



ECOearth, Dell Children's Medical Center, TX Architect: Karlsberger
Platinum-level LEED-certified healthcare project

ECOearth[®]

Dig the organic colors.

Be inspired by nature and protect it, too. The ECOearth palette features a rainbow of artfully blended colors found on Mother Earth. From rich and vivid purple Mountain Majesty to warm and golden Bit O' Hunny, the accent and neutral tones energize your creative vibes.

Plus, you'll groove on the fact that Cate Moss isn't just green in name only. Our environmentally-responsible manufacturing process helps you earn points for your project under the US/Canada LEED rating system and other global environmental initiatives.



ECOstone, Trek Bicycle Store of Columbus, OH
Architect: L.H. Cowan & Associates, Inc.

ECOstone[®]

Score some satisfaction.

The stones. They never grow old. And like us, they have global appeal. ECOstone's visual features the ageless elegance of fine marble chip flooring. The 100% recycled rubber construction is more flexible to install, easier to walk on and warmer to the touch than the stone cold stuff. Tap into your inner moonchild with Rollin' Stone or nine other hard rock looks in neutral colors accented with subtle golds and soft greys.

ECOearth and ECOstone


Various Dimensions

Rolls	48" x 5/32"	(4 mm standard)
	48" x 1/4"	(6 mm special- 5,000 sq. ft. min.)
	Standard 50' rolls	
Tiles	36" x 36"	
	18" x 18"	
	Available in 4 mm standard; 6 mm special	

ECOearth Color Line



ECOstone Color Line

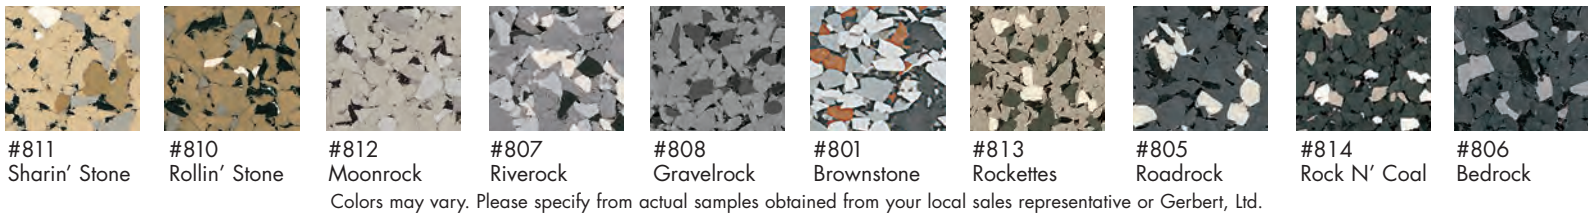

Physical Data

Test	ASTM	Result
Tensile Strength	D412	200 lb/in ² min
Flexibility	F137	Pass 1/4 inch mandrel
Coefficient of Friction	D2047	>0.9
Thermal Conductivity	C518	0.445 Btu-in/hr-ft ² -°F
Static Load Limit	F970, 400 lbs	<0.005 in
Chemical Resistance	F925	slight change
Impact Insulation Class	E492	48
Sound Transmission Coefficient	E413	51
Noise Reduction Coefficient	C423	0.05 sabine/ft ²
Sustainability	E2129-01	data collected
CHPS Section 01350	D5116	pass

Brief Architectural Specifications

ECOsurfaces Commercial Recycled Rubber Flooring:

The single-ply, rubber surface furnished under this specification shall be ECORE's _____ (specify one of the ECOsurfaces products listed below).

ECOearth & ECOstone are a non-laminated, single-ply surface made from multiple colored reprocessed EPDM rubber. The color shall be (specify: color number and name).

ECOsurfaces rolled products shall be 4' wide. The rolled rubber surface will have an overall thickness of _____ (specify: 5/32" [4 mm] standard, 1/4" [6 mm] special order - 5000 sq. ft. min.).

ECOsurfaces tile products shall be _____ (specify: 18" x 18" or 36" x 36" and thickness of 5/32" [4 mm] or 1/4" [6 mm]).

ECOsurfaces shall meet standards specified under the LEED® (Leadership in Energy and Environmental Design) criteria developed by the U.S. Green Building Council (USGBC).

For the ECORE International™ warranty to apply, only use recommended adhesive and follow all ECORE approved installation and maintenance procedures. The rubber flooring shall comply with the Americans with Disabilities Act (ADA) regulations.

Technical Data: For complete guide specifications, log on to www.ecosurfaces.com or call 1-877-326-7873.

Installation

Basic installation procedures and tools are the same as other standard commercial resilient flooring. ECOsurfaces should be installed by experienced floor covering mechanics. Instructions in the ECOsurfaces installation manual should be followed and are available at www.ecosurfaces.com or through your ECOsurfaces representative.

Cleaning and Maintenance

All ECOsurfaces flooring systems must be maintained as recommended. The type and frequency of maintenance will vary according to maintenance equipment and desired appearance of product. Detailed maintenance instructions are available at www.ecosurfaces.com or through your ECOsurfaces representative.

Warranty

ECOsurfaces is guaranteed by ECORE to be free of manufacturing defects in both material and workmanship. If such a defect is discovered, the customer must notify ECORE directly or through the contracting installer or distributor. If found to be defective within five years, the sole remedy against the seller will be either the replacement or repair of the defective goods, or at the seller's option, credit may be issued not exceeding the selling price of the defective goods.

The ECOsurfaces warranty shall not cover dissatisfaction due to improper maintenance or installation, damage from improper maintenance or usage or general misuse, including, without limitation, burns, cuts, tears, scratches, scuffs, indentation damage from high heels, rolling loads, damage or discoloration from floor care products not recommended by either Gerbert Ltd. or ECORE, extended exposure to direct sunlight or differences in color between samples or photographs and actual flooring.